
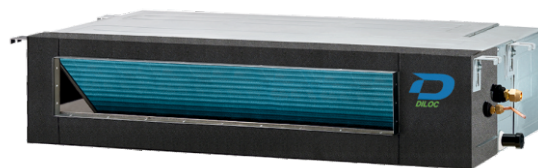


CASSETTE E DUCT ALTA POTENZA

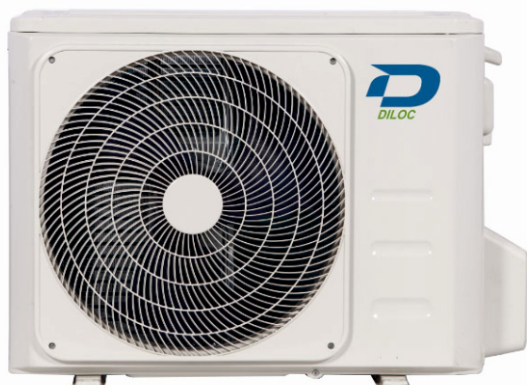

		D.EXT-COM24+ D.IN-DUCT24	D.EXT-COM30+ D.IN-DUCT30	D.EXT-COM36+ D.IN-DUCT36	D.COM-OUT36-32+ D.CASSETTE-IN36-32
Alimentazione		220-240V~/50Hz/1P			
Raffreddamento					
Capacità nominale	Btu	24000(7500~27000)	30000(8800~36000)	36000(10500~42000)	36000(13800~41000)
	W	7040(2200~7920)	8800(2580~10600)	10550(3080~12300)	10550 (4040~12020)
Potenza assorbita UE/UI	W	2285(710~2900)/100(20~135)	2500(695~3440)/180(25~215)	3210(935~4340)/180(55~240)	3750(890~4500)/141
Corrente assorbita UE/UI	A	10.2(3.8~12.8)/0.8(0.2~1.0)	11.0(3.3~15.2)/1.4(0.3~1.6)	14.6(4.8~19.1)/1.4(0.5~1.8)	16.3(3.9~19.6) (UE)
SEER		6,1	6,1	6,1	6,1
Classe di efficienza energetica		A++	A++	A++	A++
Capacità (pdesignc)	W	7000	8800	10500	10500
Riscaldamento (clima medio)					
Capacità nominale	Btu	26000(7900~28500)	32000(9200~39200)	39000(11200~46000)	38000(10050~46000)
	W	7620(2320~8350)	9380(2700~11500)	11500(3280~13500)	11140(2940~13480)
Potenza assorbita UE/UI		1930(745~2795)/100(20~135)	2130(695~3745)/180(25~215)	2860(825~4400)/180(55~240)	2993(720~4450)/141
Corrente assorbita UE/UI	A	8.5(4.0~12.5)/0.8(0.2~1.0)	9.4(3.3~16.8)/1.4(0.3~1.6)	12.5(4.2~19.5)/1.4(0.5~1.8)	13.0(3.2~19.4) (UE)
SCOP		4,0	4,0	4,0	4,0
Classe di efficienza energetica		A+	A+	A+	A+
Capacità (pdesignh)- medio-		5600	8200	10200	8800
Unità interna					
Portata d'aria (Raffr./Risc.)		1000/1250	1600/1850	1800/2000	1775/1620/1438
Livello di potenza sonora (S/H/M/L/Mute)	dB(A)	59/58/52/46/44	63/62/56/48/46	63/62/55/49/47	61 (max)
Dimensioni (L*P*A)		920x270x570	1140x270x710	1200x300x800	840x840x245 (corpo) 950x950x55 (pannello)
Peso netto/lordo		27/31	37/44	44/51	27.5/31
Unità Esterna					
Portata d'aria		2700	4000	4300	4000
Livello di potenza sonora	dB(A)	68	69	70	68
Dimensioni (L*P*A)	mm	845x694x330	940x885x338	940x885x338	946x810x410
Peso netto/lordo	Kg	39/44	62/72	69/79	66,8/72,9
Consumo annuo Energia					
Raffreddamento	kwh/a	402	505	602	605
Medio	kwh/a	1960	2870	3570	3108
Capacità di deumidificazione	l/h	2,00	2,60	3,40	3,60
Refrigerante-Tipo/GWP		R32/675	R32/675	R32/675	R32/675
Quantità precaricata/TCO2eq.		1,25Kg/0,844t.	2,2Kg/1,48t.	2,40Kg/1,624t.	2,4Kg/1,62t.
Tubazione gas					
Lato liquido/Lato gas	Pollici	1/4"/1/2"	3/8"/5/8"	3/8"/5/8"	3/8"/5/8"
Max lungh. Tubazioni/dislivello	m	50/25	50/25	65/30	65/30
Pressione statica esterna (nominale)	Pa	25	37	37	0
Pressione statica esterna (intervallo)	Pa	0-80	0-100	0-100	0
Area di applicazione	m²	27~45	33~58	39~71	39~71
Intervallo Temp. di funzionamento					
Esterno (Raffr./Risc.)	°C	-15-50/-15-24	-15-50/-15-24	-15-50/-15-24	-15-50/-15-24
Interno (Raffr./Risc.)	°C	17-32/0-30	17-32/0-30	17-32/0-30	17-32/0-30