


SERIE MULTI FREEDOM

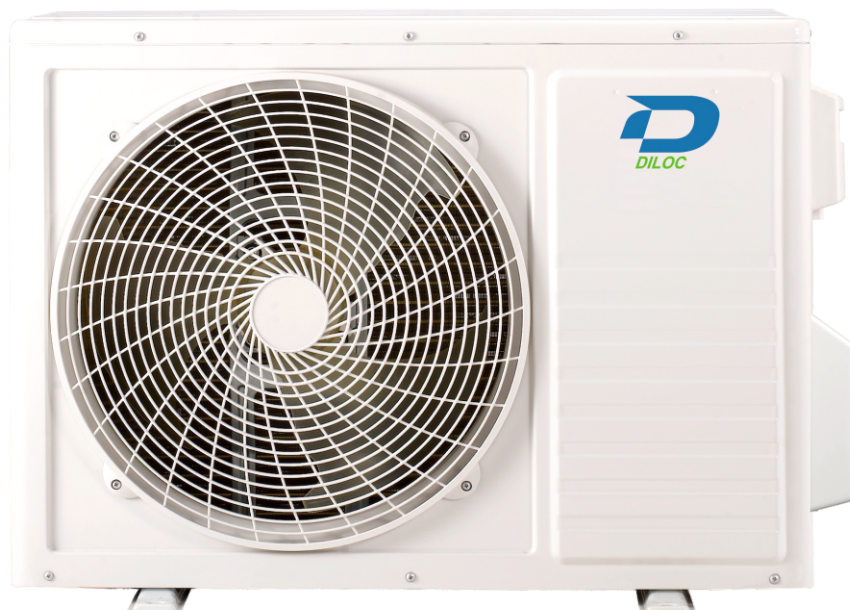

		D.FREEDOM240	D.FREEDOM245	D.FREEDOM360	D.FREEDOM480	D.FREEDOM500
Rif. Unità Interna - Capacità Btu/h		9k+9k	9k+9k	9k+9k+9k	9k+9k+9k+9k	9k+9k+9k+9k+9k
Alimentazione		220-240V~/50HZ				
Capacità nominale	Btu/h	14000(4000~16500)	18000(4200~19100)	21000(9500~22500)	32000(10600~35000)	42000(11300~44700)
	kW	14(4~16,5)	5,2(1,23~5,6)	6,2(2,8~6,6)	9,4(3,1~10,2)	12,2(3,3~13,1)
Potenza assorbita		1246(250~1560)	1605(280~2053)	1920(340~2580)	2765(410~3500)	3812(730~5400)
Corrente assorbita	W	6.3(1.2~8.0)	8.2(1.3~10.5)	9.8(1.5~13.2)	14.1(1.8~17.0)	16.8(3.2~24.0)
EER	A	3,29	3,24	3,23	3,4	3,2
Capacità nominale	Btu/h	14700(4300~17800)	18050(4400~19600)	22000(8350~23200)	32000(8700~35000)	42000(11300~44700)
	kW	4,31(1,25~5,2)	5,29(1,29~5,75)	6,5(2,45~6,8)	9,45(2,55~10,2)	12,2(3,3~13,1)
Potenza assorbita	W	1159(230~1560)	1418(250~2053)	1752(400~2580)	2547(510~3500)	3686(800~5400)
Corrente assorbita	A	5.9(1.1~8.0)	7.3(1.2~10.5)	9.0(1.7~13.2)	13.0(2.3~17.0)	15.8(3.5~24.0)
COP		3,71	3,73	3,71	3,71	3,31
Raffr. Stagionale Capacità (Pdesignc)	kW	4,1	5,2	6,2	9,3	12,2
SEER/Classe efficienza energetica		6.1 (A++)	6.2 (A++)	6.1 (A++)	6.1 (A++)	6.1 (A++)
Risc. (Clima caldo) Capacità (Pdesignh)	kW	3,8	4,4	5,4	7,3	9,5
SCOP/Classe efficienza energetica		4.0 (A+)	4.0 (A+)	4.0 (A+)	4.0 (A+)	4.0 (A+)
Livello di potenza sonora (Alta)	dB(A)	65	65	68	70	70
Dimensioni (L*P*A)	mm	835×605×360	835×605×360	968×655×375	990×910×340	990×910×340
Peso netto/lordo	Kg	34/38	34/38	46	68	73
Refrigerante						
Tipo /GWP/Quantità precaricata		R32/675/1100g	R32/675/1100g	R32/675/1600g	R32/675/2200g	R32/675/3000g
Tubazione gas						
Lato liquido	mm(inch)	1/4"	1/4"	1/4"	1/4"	1/4"
Lato gas		3/8"	3/8"	3/8"	3/8"	3/8"